

商佑不銹鋼防震接頭

STAINLESS STEEL FLEXIBLE JOINT

▲SF-500T 系列


◎ 說明

- 取代橡膠接頭，以隔絕泵浦、空氣壓縮機、冷凍空調設備的振動並吸收其噪音。
- 吸收高溫管線所產生的熱膨脹。
- 連接輕微的配管偏斜並消除其應力。

◎ INSTRUCTION

- Substitute rubber joint to isolate the vibration of pump, air-compressor & airconditioning. And to reduce the noise of pipe.
- Absorb thermal growth motion.
- Compensate for misalignment-Eliminate the stresses.

SF-500T

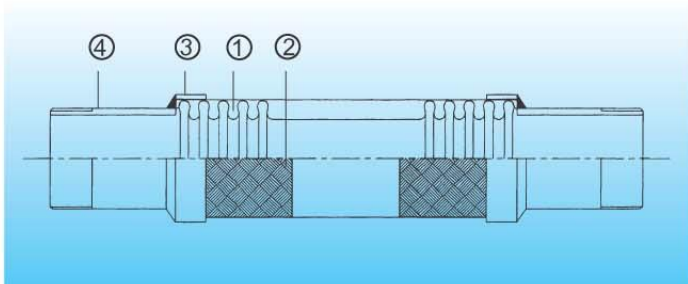

◎ 應用

- 設備端與管路銜接用
- 小型泵浦與管路銜接用
- 工業用小口徑防震接頭
- 管路水錘振動吸收



◎ APPLICATION

- Using equipment point to link with tube route.
- Using small-scale pump to link with tube route.
- Using industrial small-bore shockproof joint.
- Using water hammer vibrate recruiting in tube route.

◎ 構件 CONSTRUCTION

ITEM	PARTS	MATERIAL	REMARK
1	BELLOWS	SUS304	SUS316
2	WIRE BRAIDS	SUS304	
3	SEAL RING	SUS304	SUS316
4	TUBE END	SUS304	SUS316 PT或NPT

◎ SF-500T系列性能規格表 SPECIFICATION ◎ 下述工作壓力以常溫25°C為基準

TYPE 型號	Nominal Bore 口徑		Total Length 總長度		Bellows	Max offset	Working Pressure:	
	mm	Ins	mm	Ins	O.D.	最大振幅	工作壓力	
					外徑		mm	PSI
SF500T	15	1/2	250	10	30.5	20	300	20
SF500T	20	3/4	250	10	30.5	20	300	20
SF500T	25	1	250	10	38	20	300	20
SF500T	32	1-1/4	250	10	46	18	300	20
SF500T	40	1-1/2	300	12	56	16	300	20
SF500T	50	2	300	12	70	15	300	20
SF500T	65	2-1/2	350	14	86.5	14	300	20
SF500T	80	3	350	14	101.5	12	300	20