


# 商佑不銹鋼外筒保護伸縮接頭

## STAINLESS STEEL EXTERNAL COVER EXPANSION JOINT

### ▲SF-1000/1000H 系列

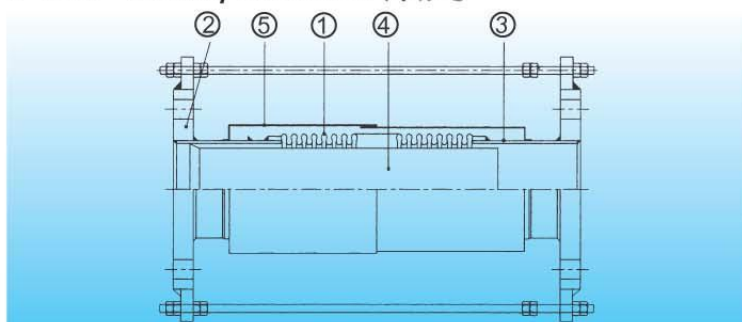

SF-1000 / 1000H

### ◎ 構件 CONSTRUCTION

ITEM	PARTS	MATERIAL	REMARK
1	BELLOWS	SUS304	SUS316
2	FLANGES	SS400	SUS304 / 316 (OPTION)
3	TUBE END	SGP	SUS304 / 316 (OPTION)
4	INTERNAL SLEEVE	SUS304	
5	EXTERNAL COVER	SS400	SUS304 / 316 (OPTION)

### ◎ 應用

適用於高溫及室外等特殊工作場所。

### ◎ APPLICATION

Apply in vsing like as high temperature, outdoor and so on, special work place.

### ◎ SF-1000 系列性能規格表 SPECIFICATION (中、低壓用) ◎ 下述工作壓力以常溫25°C為基準

Nominal Bore 口徑		Total Length 總長度	Bellows		Effective Area 流體面積	Axial Movement 伸縮量	Working Pressure 工作壓力
mm	Ins		O.D. 外徑	Corr's No. 山數			
40	1-1/2	400	58	26	22.2	+10 -30	10
50	2	400	70	24	34.4	+10 -35	10
65	2-1/2	400	86	20	52.5	+10 -35	10
80	3	400	101	20	71.2	+10 -40	10
100	4	400	128	16	110.5	+10 -40	10
125	5	400	157	15	168.7	+10 -40	10
150	6	400	185	14	233.9	+10 -40	10
200	8	400	243	13	389.1	+10 -40	10
250	10	400	297	12	592.2	+10 -40	10
300	12	400	348	12	829.7	+10 -40	10
350	14	400	380	12	1102	+10 -40	10

### ◎ SF-1000H 系列性能規格表 SPECIFICATION (高壓用) ◎ 下述工作壓力以常溫25°C為基準

Nominal Bore 口徑		Total Length 總長度	Bellows		Effective Area 流體面積	Axial Movement 伸縮量	Working Pressure 工作壓力
mm	Ins		O.D. 外徑	Corr's No. 山數			
40	1-1/2	400	58	32	17.6	+10 -40	25
50	2	400	70	24	30.4	+10 -40	25
65	2-1/2	400	86	20	43.8	+10 -40	25
80	3	400	101	20	62.8	+10 -40	25
100	4	400	128	16	107.7	+10 -40	25
125	5	400	157	15	162.9	+10 -40	25
150	6	400	185	14	227.5	+10 -40	25
200	8	400	243	13	385.3	+10 -40	25
250	10	400	297	12	670.1	+10 -40	25
300	12	400	348	12	923.5	+10 -40	25
350	14	400	380	12	1102	+10 -40	25

\*口徑16" 以上規格另行提供。 \* The specifications are more than caliber 16" to be provided separately.